

EMB-CV1
Manual 2nd Ed.
August 2012

Copyright Notice

This document is copyrighted, 2012. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, the original manufacturer assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

The original manufacturer reserves the right to make changes in the product design without notice to its users.

Acknowledgments

All other products' name or trademarks are properties of their respective owners.

- AMI is a trademark of American Megatrends Inc.
- CompactFlash™ is a trademark of the Compact Flash Association.
- Intel® and Atom™ are trademarks of Intel® Corporation.
- Microsoft Windows® is a registered trademark of Microsoft Corporation.
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.
- SoundBlaster is a trademark of Creative Labs, Inc.

Please be notified that all other products' name or trademarks not be mentioned above are properties of their respective owners.

Packing List

(Standard, not bulk pack)

Before you begin installing your card, please make sure that the following materials have been shipped:

- 1 Cable Set (SATA Cable, SATA Power Cable)
- 1 Metal I/O Bracket
- 1 Product CD
- 1 Industrial Motherboard

If any of these items should be missing or damaged, please contact your distributor or sales representative immediately.

Contents

Chapter 1 General Information

1.1 Features.....	1-2
1.2 Specifications.....	1-3

Chapter 2 Quick Installation Guide

2.1 Safety Precautions	2-2
2.2 Location of Connectors and Jumpers	2-3
2.3 Mechanical Drawing	2-4
2.4 List of Jumpers	2-6
2.5 List of Connectors	2-6
2.6 Setting Jumpers	2-9
2.7 AT/ATX Mode Selection (ATMODE)	2-10
2.8 Clear COMS (CLRTC).....	2-10
2.9 COM2 External Power Selection (DIGITALREFERENCE)	2-10
2.10 LVDS Panel Power Selection (LVDS_VDD_SEL)	2-10
2.11 LVDS Brightness Control Type Selection (L_BRIGHTNESS)	2-10
2.12 LVDS function Enable (LVDS_SWITCH)	2-11
2.13 LVDS Panel Backlight Power Selection (LCD_POWER_SEL)	2-11
2.14 Watchdog Timer Function Switch (WDT)	2-11
2.15 +12V AUX Pwer Cnnector (CON2)	2-11

2.16 CPU/SYSTEM FAN Connector (CPU_FAN/CHA_FAN)	2-11
2.17 COM3/COM4/COM5 RS232 Serial Port PIN HEADER (COM3/COM4/COM5)	2-12
2.18 GPIO/SM BUS/COM2/ COM2 External Power Selection (DIGITALREFERENCE)	2-12
2.19 Front Panel Pin Header(F_PANEL)	2-13
2.20 PS/2 Keyboard/Mouse Connector (KB/MS)	2-13
2.21 LVDS Panel Power Connector (LCD_POWE)	2-13
2.22 Parallel Port Connector (LPT)	2-14
2.23 LVDS Panel Connector (LVDS)	2-14
2.24 Serial ATA power Connector (SATA_PWR1)	2-16
2.25 USB 5 & 6 PIN HEADER (USB56)	2-16
2.26 USB 7 PIN HEADER (USB7)	2-16

Chapter 3 AMI BIOS Setup

3.1 System Test and Initialization	3-2
3.2 AMI BIOS Setup	3-3

Chapter 4 Driver Installation

4.1 Installation	4-3
------------------	-----

Appendix A Programming The Watchdog Timer

A.1 Programming	A-2
A.2 ITE8783 Watchdog Timer Initial Program	A-6

Appendix B I/O Information

B.1 I/O Address Map.....B-2
B.2 1st MB Memory Address MapB-4
B.3 IRQ Mapping Chart.....B-5
B.4 DMA Channel Assignments.....B-6

Appendix C Mating Connector

C.1 List of Mating Connectors and Cables.....C-2

Chapter

1

**General
Information**

1.1 Features

- Onboard Intel® Atom™ D2550 Processor
- Intel® NM10
- Intel® Graphics Media Accelerator 3600 Supports DirectX 10, OpenGL 3.0
- DDR3 1066 DIMM x 2, Max. 4GB
- VGA, 18/24-bit LVDS, DVI, Dual Independent Display
- Dual Gigabit Ethernet
- COM x 5 (RS-232 x 4, RS-232/422/485 x 1)
- USB2.0 x 6, SATA 3Gb/s x 2
- PCI-Express [x1] x 1, Mini PCIe x 1
- 5.1 CH Audio Channel

1.3 Specifications

System

- Processor Intel® Atom™ D2550 Dual Core Processor, up to 1.86GHz
- System Memory 204-pin single channel DDR3 800/1066 DIMM x 2, Max. 4GB (When you install only one memory module, install it on DIMM A2 slot)
- Chipset Intel® NM10
- I/O Chipset ITE IT8783F
- Ethernet Realtek 8111E for 10/100/1000Base-TX, RJ-45 x 2
- BIOS AMI BIOS, 32MB ROM
- Wake On LAN Yes
- Watchdog Timer System reset: 1~255 steps programmable
- H/W Status Monitoring Supports Power Supply Voltage, Fan Speed, and Temperature Monitoring
- Expansion Interface PCI-Express[x1] x 1, Mini PCIe x 1
- Battery Lithium battery
- Power Requirement DC 12V (selectable AT/ATX mode)
- Board Size 6.7"(L) x 6.7"(W) (170 mm x 170 mm)
- Gross Weight 1.1 lb (0.5 Kg)
- Operating Temperature 32°F~ 140°F (0°C ~ 60°C)
- Storage Temperature -40°F~ 185°F (-40°C ~ 85°C)

- Operating Humidity 5%~95% relative humidity, non-condensing

Display

- Chipset Intel® Graphics Media Accelerator 3650
- Resolution Up to 1440x900 18/24-bit
- LCD Interface 18/24-bit LVDS
- Video Interface VGA x 1, DVI-D x 1

I/O

- Storage SATA x 2 (support AHCI mode)
- Serial Port RS-232 x 4, RS-232/422/485 x 1 (RS-422/485 is selectable by BIOS)
- Parallel Port STD/SPP/EPP
- USB USB2.0 x 6 (5x2 pin header for internal x 2, onboard Type A connector x 4)
- Digital I/O Supports 8-bit (Programmable)
- PS/2 Port Keyboard/ Mouse x 1
- Audio Line-in, Mic-in, Line-out

Chapter

2

**Quick
Installation
Guide**

2.1 Safety Precautions


Warning!

Always completely disconnect the power cord from your board whenever you are working on it. Do not make connections while the power is on, because a sudden rush of power can damage sensitive electronic components.

Caution!


Always ground yourself to remove any static charge before touching the board. Modern electronic devices are very sensitive to static electric charges. Use a grounding wrist strap at all times. Place all electronic components on a static-dissipative surface or in a static-shielded bag when they are not in the chassis

2.2 Location of Connectors and Jumpers

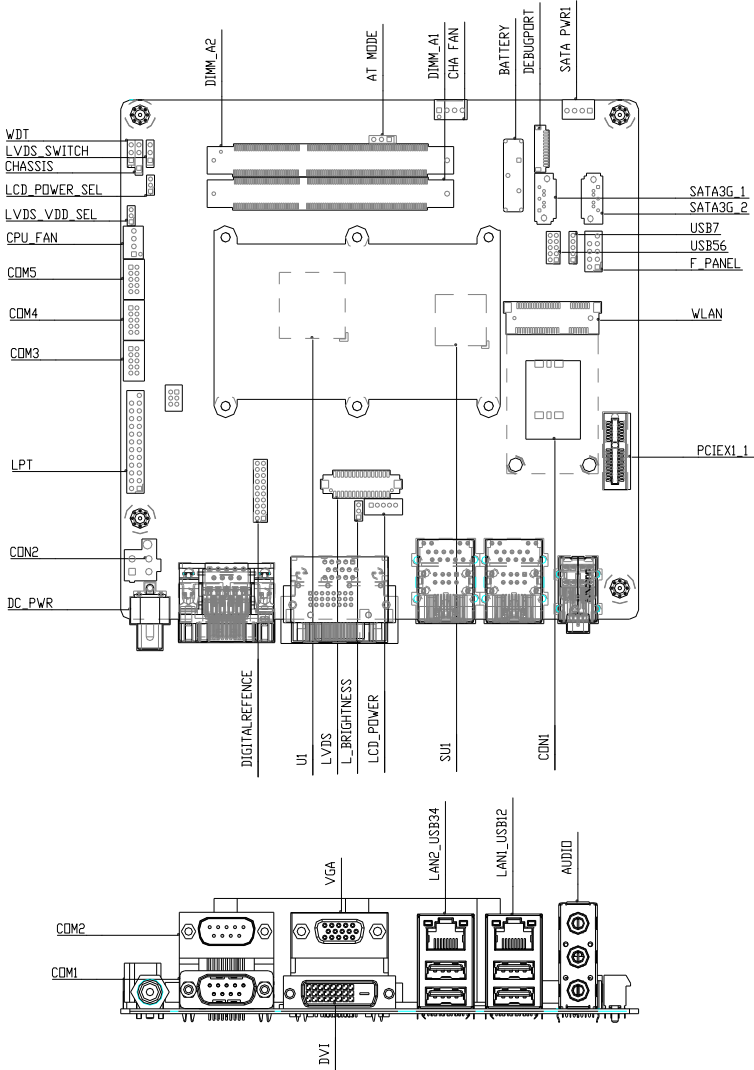


2.3 Mechanical Drawing

Component Side

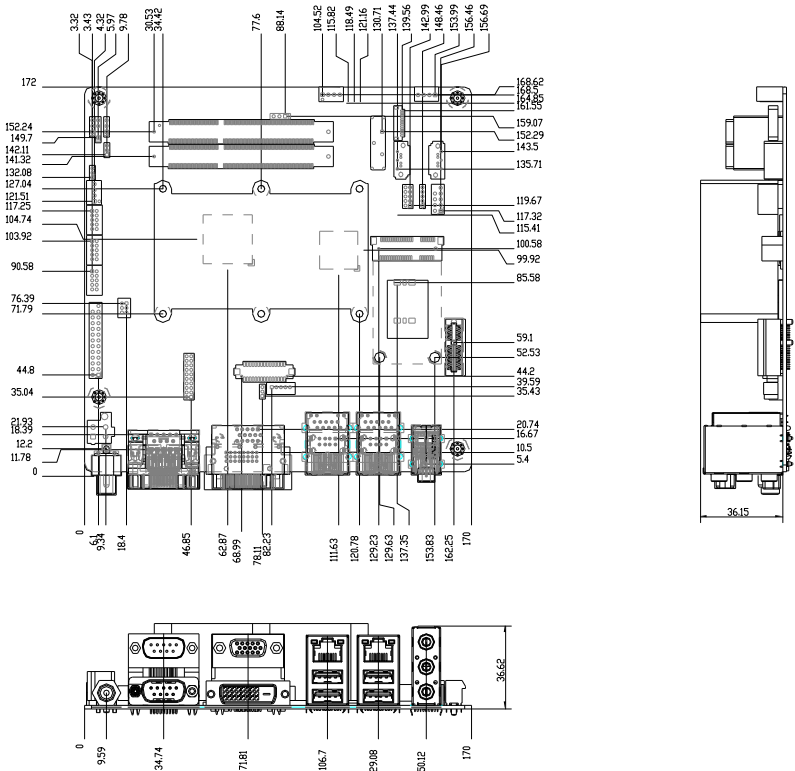

Solder Side

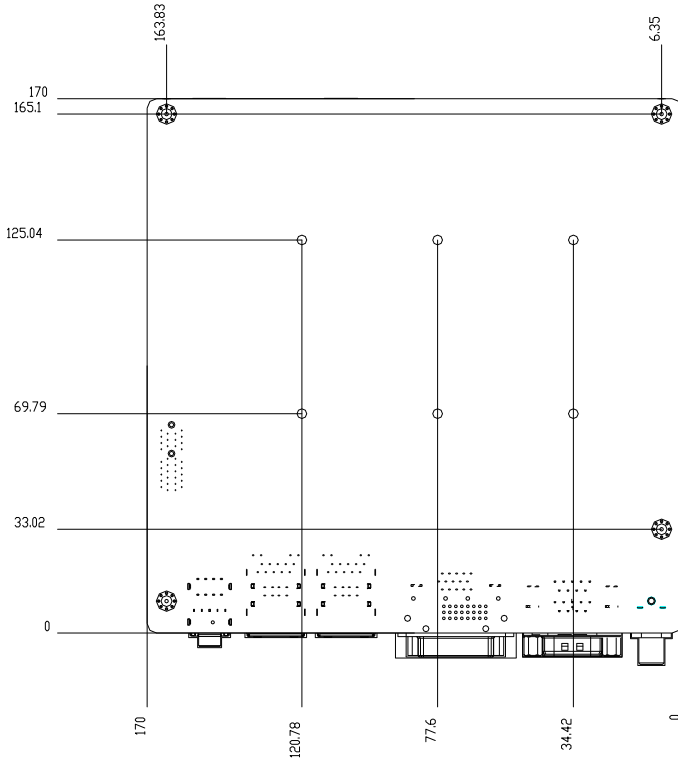

2.4 List of Jumpers

The board has a number of jumpers that allow you to configure your system to suit your application.

The table below shows the function of each of the board's jumpers:

Label	Function
ATMODE	AT/ATX Mode Selection
CLRTC	Clear COMS
DIGITALREFENCE	COM2 External Power Selection
LVDS_VDD_SEL	LVDS Panel Power Selection
L_BRIGHTNESS	LVDS Brightness Control Type Selection
LVDS_SWITCH	LVDS Function Enable
LCD_POWER_SEL	LVDS Panel Backlight Power Selection
WDT	Watchdog Timer Function Switch

2.5 List of Connectors

The board has a number of connectors that allow you to configure your system to suit your application.



The table below shows the function of each of the board's connectors:

Label	Function
DC_PWR	+12V Power connector
CON2	+12V AUX Power Connector
CHA_FAN	System FAN Connector
COM3	COM 3 Connector

COM4	COM 4 Connector
COM5	COM 5 Connector
CON1	SIM Card Socket
CPU_FAN	CPU FAN Connector
DIGITALREFENCE	GPIO/SM BUS/COM2/ COM2 External Power Selection
F_PANEL	Front Panel Pin Header
KB/Ms	PS/2 Keyboard / Mouse Connector
LCD_POWE	LVDS Panel Power Connector
LPT	Parallel Port Connector
LVDS	LVDS Panel Connector
PCIEX1_1	PCI-E [x1] Slot
SATA_PWR1	Serial ATA Power Connector
SATA3G_1	SATA 0 Connector
SATA3G_2	SATA 1 Connector
USB56	USB 5 & 6 Pin Header
USB7	USB 7 Pin Header
WLAN	Mini PCI-E Slot




NOTE: The +12V Power connector (Label: DC_PWR) is lockable Jack type with screw. Please refer the inner and outer diameter dimension of connector as below to choose suitable adaptor.



2.6 Setting Jumpers

You configure your card to match the needs of your application by setting jumpers. A jumper is the simplest kind of electric switch. It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To “close” a jumper you connect the pins with the clip.

To “open” a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2 and 3. In this case you would connect either pins 1 and 2 or 2 and 3.

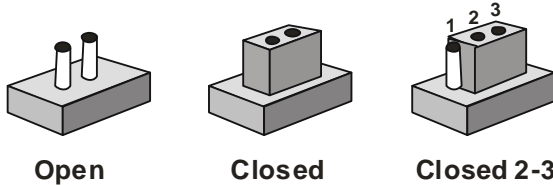

A pair of needle-nose pliers may be helpful when working with jumpers.

If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any change.

Generally, you simply need a standard cable to make most connections.

2.7 AT/ATX Mode Selection (ATOMODE)

ATOMODE	Function
Close 1-2	AT
Close 2-3	ATX Mode (Default)

2.8 Clear COMS (CLRTC)

CLRTC	Function
Close 1-2	Protected (Default)
Close 2-3	Clear

2.9 COM2 External Power Selection (DIGITALREFERENCE)

DIGITALREFERENCE	Function
Close 15-16	+12V
Close 17-18	RI# (Default)
Close 19-20	+5V

2.10 LVDS Panel Power Selection (LVDS_VDD_SEL)

LVDS_VDD_SEL	Function
Close 1-2	+3.3V (Default)
Close 2-3	+5V

2.11 LVDS Brightness Control Type Selection (L_BRIGHTNESS)

L_BRIGHTNESS	Function
Close 1-2	Voltage Control (Default)
Close 2-3	PWM Control

2.12 LVDS function Enable (LVDS_SWITCH)

LVDS_SWITCH	Function
Close 1-2	Disable
Close 2-3	Enable (Default)

2.13 LVDS Panel Backlight Power Selection (LCD_POWER_SEL)

LCD_POWER_SEL	Function
Close 1-2	+12V
Close 2-3	+5V (Default)

2.14 Watchdog Timer Function Switch (WDT)

WDT	Function
Close 1-2	Disable (Default)
Close 2-3	Enable

2.15 +12V AUX Power Connector (CON2)

Pin	Signal	Pin	Signal
1	GND	2	GND
3	+12V	4	+12V

2.16 CPU/SYSTEM FAN Connector (CPU_FAN/CHA_FAN)

Pin	Signal	Pin	Signal
1	FAN Control	2	FAN Sense
3	+12V	4	GND

2.17 COM3/COM4/COM5 RS-232 Serial Port PIN HEADER (COM3/COM4/COM5)

Pin	Signal	Pin	Signal
1	DCD	2	RXD
3	TXD	4	DTR
5	GND	6	DSR
7	RTS	8	CTS
9	RI	10	NC

2.18 GPIO/SM BUS/COM2/ COM2 External Power Selection (DIGITALREFERENCE)

Pin	Signal	Pin	Signal
1	GP50	2	GP51
3	GP52	4	GP53
5	GP54	6	GP55
7	GP56	8	GP57
9	+5V	10	GND
11	SMB_CLOCK	12	SMB_DATA
13	+5V	14	GND
15	COM2_RI#	16	+12V
17	COM2_RI#	18	RI#
19	COM2_RI#	20	+5V

COM2 RS-232/422/485 connector

Pin	Signal	Pin	Signal
1	DCD (422TXD-/485DATA-)	2	RXD (422RXD+)
3	TXD (422TXD+/485DATA+)	4	DTR (422RXD-)
5	GND	6	DSR
7	RTS	8	CTS
9	RI/+12V/+5V	10	N.C.

2.19 Front Panel Pin Header (F_PANEL)

Pin	Signal	Pin	Signal
1	HDDLED+	2	POWERLED+
3	HDDLED-	4	POWERLED-
5	RESET-	6	PWRBTN+
7	RESET+	8	PWRBTN-
9	N/C		

2.20 PS/2 Keyboard/Mouse Connector (KB/MS)

Pin	Signal	Pin	Signal
1	KB_DATA	2	KB_CLK
3	GND	4	+5V
5	MS_DATA	6	MS_CLK

2.21 LVDS Panel Power Connector (LCD_POWE)

Pin	Signal	Pin	Signal
-----	--------	-----	--------

1	Panel Power	2	Panel brightness control
3	GND	4	GND
5	Panel backlight control		

2.22 Parallel Port Connector (LPT)

Pin	Signal	Pin	Signal
1	STB#	2	AFD#
3	DATA 0	4	ERROR#
5	DATA 1	6	INIT#
7	DATA 2	8	SLIN#
9	DATA 3	10	GND
11	DATA 4	12	GND
13	DATA 5	14	GND
15	DATA 6	16	GND
17	DATA 7	18	GND
19	ACK#	20	GND
21	BUSY	22	GND
23	PE	24	GND
25	SLCT		

2.23 LVDS Panel Connector (LVDS)


Pin	Signal	Pin	Signal
1	NC	2	NC
3	Panel power	4	GND

5	NC	6	NC
7	NC	8	NC
9	NC	10	NC
11	NC	12	NC
13	DDC_DATA	14	DDC_CLOCK
15	DATA3-	16	DATA3+
17	DATA2-	18	DATA2+
19	DATA1-	20	DATA1+
21	DATA0-	22	DATA0+
23	Panel power	24	GND
25	LVDS_CLOCK-	26	LVDS_CLOCK+
27	Panel power	28	GND
29	Backlight enable	30	Brightness control



NOTE: LVDS connector Vendor: PINREX; Model: 712-76-30GWR8.

Please refer the drawing below, notice the location of PIN1, PIN2, PIN29 and PIN30.

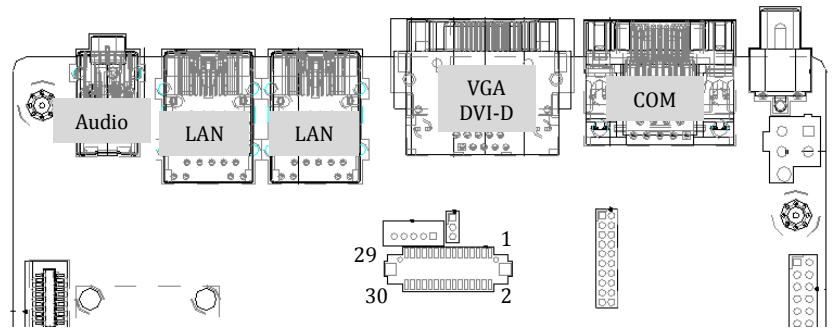

2.24 Serial ATA Power Connector (SATA_PWR1)

Pin	Signal	Pin	Signal
1	+5	2	GND
3	GND	4	+12V

2.25 USB 5 & 6 PIN HEADER (USB56)

Pin	Signal	Pin	Signal
1	+5V	2	GND
3	USBD-	4	GND
5	USBD+	6	USBD+
7	GND	8	USBD-
9	GND	10	+5V

2.26 USB 7 PIN HEADER (USB7)

Pin	Signal	Pin	Signal
1	+5V	2	GND
3	USBD-	4	GND
5	USBD+	6	USBD+
7	GND	8	USBD-
9	GND	10	+5V

Chapter

3

**AMI
BIOS Setup**

3.1 System Test and Initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors.

System configuration verification

These routines check the current system configuration against the values stored in the CMOS memory. If they do not match, the program outputs an error message. You will then need to run the BIOS setup program to set the configuration information in memory.

There are three situations in which you will need to change the CMOS settings:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The CMOS memory has lost power and the configuration information has been erased.

The EMB-CV1 CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it runs down.

3.2 AMI BIOS Setup

AMI BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM so that it retains the Setup information when the power is turned off.

Entering Setup

Power on the computer and press or <F2> immediately. This will allow you to enter Setup.

Main

Set the date, use tab to switch between date elements.

Advanced

Advanced BIOS Features Setup including TPM, ACPI, etc.

Chipset

host bridge parameters.

Boot

Enables/disable quiet boot option.

Security

Set setup administrator password.

Save&Exit

Exit system setup after saving the changes.

Chapter

4

**Driver
Installation**

The EMB-CV1 comes with an Autorun CD-ROM that contains all drivers and utilities that can help you to install the driver automatically.

Insert the driver CD, the driver CD-title will automatically start and show the installation guide. If not, please follow the sequence below to install the drivers.

Follow the sequence below to install the drivers:

Step 1 – Install Chipset Driver

Step 2 – Install VGA Driver

Step 3 – Install LAN Device

Step 4 – Install Audio Driver

Step 5 – Install AHCI Driver

Please read instructions below for further detailed installations.

4.1 Installation:

Insert the EMB-CV1 CD-ROM into the CD-ROM drive. And install the drivers from Step 1 to Step 5 in order.

Step 1 – Install Chipset Driver

1. Click on the **Step1-INF** folder and double click on the **Setup.exe**
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 2 – Install VGA Driver

1. Click on the **Step2-VGA** folder and double click on the **Setup.exe**
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 3 –Install LAN Driver

1. Click on the **Step3-LAN** folder and double click on the **setup.exe**
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 4 –Install Audio Driver

1. Click on the **Step4-Audio** folder and double click on the **SETUP.exe**

2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 5 –Install AHCI Driver

1. Click on the **Step5-AHCI** folder and select the folder of **AP**
2. Double click on the **setup.exe**
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Appendix

A


Programming the Watchdog Timer

A.1 Programming

EMB-CV1 utilizes ITE 8783 chipset as its watchdog timer controller. Below are the procedures to complete its configuration and this initial watchdog timer program is also attached based on which you can develop customized program to fit your application.

Configuring Sequence Description

After the hardware reset or power-on reset, the ITE 8783 enters the normal mode with all logical devices disabled except KBC. The initial state (enable bit) of this logical device (KBC) is determined by the state of pin 121 (DTR1#) at the falling edge of the system reset during power-on reset.

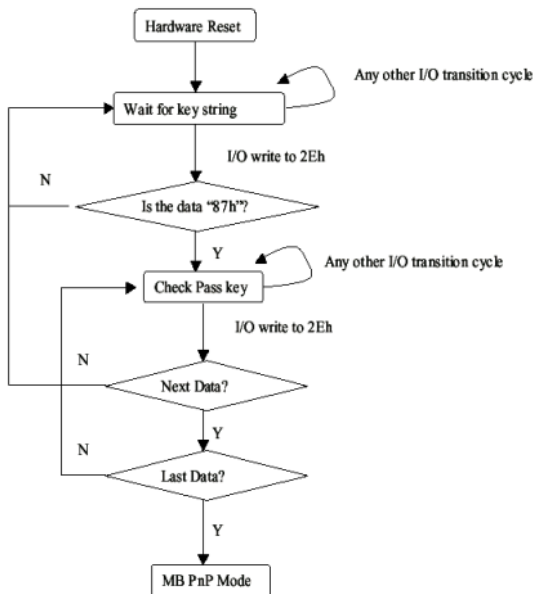

There are three steps to complete the configuration setup: (1) Enter the MB PnP Mode; (2) Modify the data of configuration registers; (3) Exit the MB PnP Mode. Undesired result may occur if the MB PnP Mode is not exited normally.

(1) Enter the MB PnP Mode

To enter the MB PnP Mode, four special I/O write operations are to be performed during Wait for Key state. To ensure the initial state of the key-check logic, it is necessary to perform four write operations to the Special Address port (2EH). Two different enter keys are provided to select configuration ports (2Eh/2Fh) of the next step.

	Address Port	Data Port
87h, 01h, 55h, 55h:	2Eh	2Fh

(2) Modify the Data of the Registers

All configuration registers can be accessed after entering the MB PnP Mode. Before accessing a selected register, the content of Index 07h must be changed to the LDN to which the register belongs, except some Global registers.

(3) Exit the MB PnP Mode

Set bit 1 of the configure control register (Index=02h) to 1 to exit the MB PnP Mode.

WatchDog Timer Configuration Registers

LDN	Index	R/W	Reset	Configuration Register or Action
All	02h	W	NA	Configure Control

07h	71h	R/W	00h	Watch Dog Timer Control Register
07h	72h	R/W	001s0000b	Watch Dog Timer Configuration Register
07h	73h	R/W	38h	Watch Dog Timer Time-out Value (LSB) Register
07h	74h	R/W	00h	Watch Dog Timer Time-out Value (MSB) Register

Configure Control (Index=02h)

This register is write only. Its values are not sticky; that is to say, a hardware reset will automatically clear the bits, and does not require the software to clear them.

Bit	Description
7-2	Reserved
1	Returns to the "Wait for Key" state. This bit is used when the configuration sequence is completed.
0	Resets all logical devices and restores configuration registers to their power-on states.

Watch Dog Timer 1, 2, 3 Control Register (Index=71h,81h,91h Default=00h)

Bit	Description
7	WDT Timeout Enable(WTE) 1: Disable. 0: Enable.
6	WDT Reset upon Mouse Interrupt(WRKMI) 0: Disable. 1: Enable.
5	WDT Reset upon Keyboard Interrupt(WRKBI) 0: Disable. 1: Enable.
4	Reserved
3-2	Reserved
1	Force Time-out(FTO) This bit is self-clearing.
0	WDT Status(WS) 1: WDT value reaches 0. 0: WDT value is not 0.

Watch Dog Timer 1, 2, 3 Configuration Register (Index=72h, 82h, 92h Default=001s0000b)

Bit	Description
7	WDT Time-out Value Select 1 (WTVS) 1: Second 0: Minute
6	WDT Output through KRST (Pulse) Enable(WOKE) 1: Enable 0: Disable
5	WDT Time-out value Extra select(WTVES) 1: 64ms x WDT Timer-out value (default = 4s) 0: Determined by WDT Time-out value select 1 (bit 7 of this register)
4	WDT Output through PWROK (Pulse) Enable(WOPE) 1: Enable 0: Disable During LRESET#, this bit is selected by JP7 power-on strapping option
3-0	Select interrupt level^{Note1} for WDT(SIL)

Watch Dog Timer 1,2,3 Time-Out Value (LSB) Register (Index=73h,83h,93h, Default=38h)

Bit	Description
7-0	WDT Time-out Value 7-0(WTV)

Watch Dog Timer 1,2,3 Time-Out Value (MSB) Register (Index=74h,84h,94h Default=00h)

Bit	Description
7-0	WDT Time-out Value 15-8(WTV)

A.2 ITE8783 Watchdog Timer Initial Program

```
.MODEL SMALL
.CODE
Main:
CALL Enter_Configuration_mode
CALL Check_Chip
mov cl, 7
call Set_Logic_Device
;time setting
mov cl, 10 ; 10 Sec
dec al
Watch_Dog_Setting:
;Timer setting
mov al, cl
mov cl, 73h
call Superio_Set_Reg
;Clear by keyboard or mouse interrupt
mov al, 0f0h
mov cl, 71h
call Superio_Set_Reg
;unit is second.
mov al, 0C0H
mov cl, 72h
```



```
call Superio_Set_Reg
; game port enable
mov cl, 9
call Set_Logic_Device
```

```
Initial_OK:
CALL Exit_Configuration_mode
MOV AH,4Ch
INT 21h
```

```
Enter_Configuration_Mode PROC NEAR
MOV SI,WORD PTR CS:[Offset Cfg_Port]
```

```
MOV DX,02Eh
MOV CX,04h
Init_1:
MOV AL,BYTE PTR CS:[SI]
OUT DX,AL
INC SI
LOOP Init_1
RET
Enter_Configuration_Mode ENDP
```

```
Exit_Configuration_Mode PROC NEAR
MOV AX,0202h
```

CALL Write_Configuration_Data

RET

Exit_Configuration_Mode ENDP

Check_Chip PROC NEAR

MOV AL,20h

CALL Read_Configuration_Data

CMP AL,87h

JNE Not_Initial

MOV AL,21h

CALL Read_Configuration_Data

CMP AL,81h

JNE Not_Initial

Need_Initial:

STC

RET

Not_Initial:

CLC

RET

Check_Chip ENDP

Read_Configuration_Data PROC NEAR

MOV DX,WORD PTR CS:[Cfg_Port+04h]

```
OUT DX,AL
MOV DX,WORD PTR CS:[Cfg_Port+06h]
IN AL,DX
RET
Read_Configuration_Data ENDP
```

```
Write_Configuration_Data PROC NEAR
MOV DX,WORD PTR CS:[Cfg_Port+04h]
OUT DX,AL
XCHG AL,AH
MOV DX,WORD PTR CS:[Cfg_Port+06h]
OUT DX,AL
RET
Write_Configuration_Data ENDP
```

```
Superio_Set_Reg proc near
push ax
MOV DX,WORD PTR CS:[Cfg_Port+04h]
mov al,cl
out dx,al
pop ax
inc dx
out dx,al
ret
Superio_Set_Reg endp.Set_Logic_Device proc near
```

```
Set_Logic_Device    proc    near
push ax
push cx
xchg al,cl
mov cl,07h
call Superio_Set_Reg
pop cx
pop ax
ret
Set_Logic_Device endp
```

```
;Select 02Eh->Index Port, 02Fh->Data Port
Cfg_Port DB 087h,001h,055h,055h
DW 02Eh,02Fh
```

END Main

Note: Interrupt level mapping

0Fh-Dh: not valid

0Ch: IRQ12

.

.

03h: IRQ3

02h: not valid

01h: IRQ1

00h: no interrupt selected

Appendix

B

I/O Information

B.1 I/O Address Map

Input/output (IO)	
[00000000 - 0000001F]	Direct memory access controller
[00000000 - 00000CF7]	PCI bus
[00000010 - 0000001F]	Motherboard resources
[00000020 - 00000021]	Programmable interrupt controller
[00000022 - 0000003F]	Motherboard resources
[00000024 - 00000025]	Programmable interrupt controller
[00000028 - 00000029]	Programmable interrupt controller
[0000002C - 0000002D]	Programmable interrupt controller
[0000002E - 0000002F]	Motherboard resources
[00000030 - 00000031]	Programmable interrupt controller
[00000034 - 00000035]	Programmable interrupt controller
[00000038 - 00000039]	Programmable interrupt controller
[0000003C - 0000003D]	Programmable interrupt controller
[00000040 - 00000043]	System timer
[00000044 - 0000005F]	Motherboard resources
[0000004E - 0000004F]	Motherboard resources
[00000050 - 00000053]	System timer
[00000060 - 00000060]	Standard PS/2 Keyboard
[00000061 - 00000061]	Motherboard resources
[00000062 - 00000063]	Motherboard resources
[00000063 - 00000063]	Motherboard resources
[00000064 - 00000064]	Standard PS/2 Keyboard
[00000065 - 00000065]	Motherboard resources
[00000065 - 0000006F]	Motherboard resources
[00000067 - 00000067]	Motherboard resources
[00000070 - 00000070]	Motherboard resources
[00000070 - 00000077]	System CMOS/real time clock
[00000072 - 0000007F]	Motherboard resources
[00000080 - 00000080]	Motherboard resources
[00000080 - 00000080]	Motherboard resources
[00000081 - 00000091]	Direct memory access controller
[00000084 - 00000086]	Motherboard resources
[00000088 - 00000088]	Motherboard resources
[0000008C - 0000008E]	Motherboard resources
[00000090 - 0000009F]	Motherboard resources
[00000092 - 00000092]	Motherboard resources
[00000093 - 0000009F]	Direct memory access controller
[000000A0 - 000000A1]	Programmable interrupt controller
[000000A2 - 000000BF]	Motherboard resources
[000000A4 - 000000A5]	Programmable interrupt controller
[000000A8 - 000000A9]	Programmable interrupt controller
[000000AC - 000000AD]	Programmable interrupt controller
[000000B0 - 000000B1]	Programmable interrupt controller
[000000B2 - 000000B3]	Motherboard resources
[000000B4 - 000000B5]	Programmable interrupt controller
[000000B8 - 000000B9]	Programmable interrupt controller
[000000BC - 000000BD]	Programmable interrupt controller
[000000C0 - 000000DF]	Direct memory access controller





























































[000000E0 - 000000EF]	Motherboard resources
[000000F0 - 000000FD]	Numeric data processor
[000002E0 - 000002E7]	Communications Port (COM6)
[000002E8 - 000002EF]	Communications Port (COM4)
[000002F0 - 000002F7]	Communications Port (COM5)
[000002F8 - 000002FF]	Communications Port (COM2)
[00000378 - 0000037F]	Printer Port (LPT1)
[000003B0 - 000003BB]	Intel(R) Graphics Media Accelerator 3600 Series
[000003C0 - 000003DF]	Intel(R) Graphics Media Accelerator 3600 Series
[000003E8 - 000003EF]	Communications Port (COM3)
[000003F8 - 000003FF]	Communications Port (COM1)
[00000400 - 0000047F]	Motherboard resources
[00000400 - 0000047F]	Motherboard resources
[000004D0 - 000004D1]	Motherboard resources
[000004D0 - 000004D1]	Programmable interrupt controller
[00000500 - 0000053F]	Motherboard resources
[00000500 - 0000057F]	Motherboard resources
[00000600 - 0000061F]	Motherboard resources
[00000680 - 0000069F]	Motherboard resources
[000006A0 - 000006AF]	Motherboard resources
[000006B0 - 000006EF]	Motherboard resources
[00000A00 - 00000A1F]	Motherboard resources
[00000A20 - 00000A2F]	Motherboard resources
[00000A30 - 00000A3F]	Motherboard resources
[00000D00 - 0000FFFF]	PCI bus
[00001000 - 0000100F]	Motherboard resources
[0000D000 - 0000D0FF]	Realtek PCIe GBE Family Controller #2
[0000D000 - 0000DFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D2
[0000E000 - 0000E0FF]	Realtek PCIe GBE Family Controller
[0000E000 - 0000EFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D0
[0000F000 - 0000F01F]	Intel(R) N10/ICH7 Family SMBus Controller - 27DA
[0000F020 - 0000F02F]	Intel(R) NM10 Express Chipset
[0000F040 - 0000F05F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27CB
[0000F060 - 0000F07F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27CA
[0000F080 - 0000F09F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27C9
[0000F0A0 - 0000F0BF]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27C8
[0000F0C0 - 0000F0C3]	Intel(R) NM10 Express Chipset
[0000F0D0 - 0000F0D7]	Intel(R) NM10 Express Chipset
[0000F0E0 - 0000F0E3]	Intel(R) NM10 Express Chipset
[0000F0F0 - 0000F0F7]	Intel(R) NM10 Express Chipset
[0000F100 - 0000F107]	Intel(R) Graphics Media Accelerator 3600 Series
[0000FFFF - 0000FFFF]	Motherboard resources
[0000FFFF - 0000FFFF]	Motherboard resources

B.2 1st MB Memory Address Map

Address Range	Device
[00000000 - 00000FFF]	Motherboard resources
[00000000 - 00000FFF]	Motherboard resources
[00000000 - 00003FFF]	Motherboard resources
[000A0000 - 000BFFFF]	Intel(R) Graphics Media Accelerator 3600 Series
[000A0000 - 000BFFFF]	PCI bus
[000C0000 - 000DFFFF]	PCI bus
[000E0000 - 000EFFFF]	PCI bus
[000F0000 - 000FFFFF]	PCI bus
[3F800000 - 3FFFFFFF]	PCI bus
[40000000 - FEBFFFFF]	PCI bus
[DFC00000 - DFCFFFFF]	Intel(R) Graphics Media Accelerator 3600 Series
[DFD00000 - DFD03FFF]	Realtek PCIe GBE Family Controller #2
[DFD00000 - DFD0FFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D2
[DFD04000 - DFD04FFF]	Realtek PCIe GBE Family Controller #2
[DFE00000 - DFE03FFF]	Realtek PCIe GBE Family Controller
[DFE00000 - DFE0FFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D0
[DFE04000 - DFE04FFF]	Realtek PCIe GBE Family Controller
[DFF00000 - DFF03FFF]	High Definition Audio Controller
[DFF04000 - DFF043FF]	Intel(R) NM10 Express Chipset
[DFF05000 - DFF053FF]	Intel(R) N10/ICH7 Family USB2 Enhanced Host Controller - 27CC
[E0000000 - EFFFFFFF]	System board
[FEC00000 - FEC00FFF]	Motherboard resources
[FED00000 - FED003FF]	High precision event timer
[FED14000 - FED19FFF]	System board
[FED1C000 - FED1FFFF]	Motherboard resources
[FED1C000 - FED1FFFF]	Motherboard resources
[FED20000 - FED8FFFF]	Motherboard resources
[FED45000 - FED8FFFF]	Motherboard resources
[FEE00000 - FEE00FFF]	Motherboard resources
[FF000000 - FFFFFFFF]	Intel(R) 82802 Firmware Hub Device
[FF000000 - FFFFFFFF]	Intel(R) 82802 Firmware Hub Device
[FFC00000 - FFFFFFFF]	Motherboard resources

B.3 IRQ Mapping Chart

Interrupt request (IRQ)	Device
(ISA) 0x00000000 (00)	System timer
(ISA) 0x00000001 (01)	Standard PS/2 Keyboard
(ISA) 0x00000003 (03)	Communications Port (COM2)
(ISA) 0x00000004 (04)	Communications Port (COM1)
(ISA) 0x00000005 (05)	Communications Port (COM5)
(ISA) 0x00000007 (07)	Communications Port (COM6)
(ISA) 0x00000008 (08)	System CMOS/real time clock
(ISA) 0x0000000A (10)	Communications Port (COM3)
(ISA) 0x0000000B (11)	Communications Port (COM4)
(ISA) 0x0000000C (12)	Microsoft PS/2 Mouse
(ISA) 0x0000000D (13)	Numeric data processor
(ISA) 0x00000051 (81)	Microsoft ACPI-Compliant System
(ISA) 0x00000052 (82)	Microsoft ACPI-Compliant System
(ISA) 0x00000053 (83)	Microsoft ACPI-Compliant System
(ISA) 0x00000054 (84)	Microsoft ACPI-Compliant System
(ISA) 0x00000055 (85)	Microsoft ACPI-Compliant System
(ISA) 0x00000056 (86)	Microsoft ACPI-Compliant System
(ISA) 0x00000057 (87)	Microsoft ACPI-Compliant System
(ISA) 0x00000058 (88)	Microsoft ACPI-Compliant System
(ISA) 0x00000059 (89)	Microsoft ACPI-Compliant System
(ISA) 0x0000005A (90)	Microsoft ACPI-Compliant System
(ISA) 0x0000005B (91)	Microsoft ACPI-Compliant System
(ISA) 0x0000005C (92)	Microsoft ACPI-Compliant System
(ISA) 0x0000005D (93)	Microsoft ACPI-Compliant System
(ISA) 0x0000005E (94)	Microsoft ACPI-Compliant System
(ISA) 0x0000005F (95)	Microsoft ACPI-Compliant System
(ISA) 0x00000060 (96)	Microsoft ACPI-Compliant System
(ISA) 0x00000061 (97)	Microsoft ACPI-Compliant System
(ISA) 0x00000062 (98)	Microsoft ACPI-Compliant System
(ISA) 0x00000063 (99)	Microsoft ACPI-Compliant System
(ISA) 0x00000064 (100)	Microsoft ACPI-Compliant System
(ISA) 0x00000065 (101)	Microsoft ACPI-Compliant System
(ISA) 0x00000066 (102)	Microsoft ACPI-Compliant System
(ISA) 0x00000067 (103)	Microsoft ACPI-Compliant System
(ISA) 0x00000068 (104)	Microsoft ACPI-Compliant System
(ISA) 0x00000069 (105)	Microsoft ACPI-Compliant System
(ISA) 0x0000006A (106)	Microsoft ACPI-Compliant System
(ISA) 0x0000006B (107)	Microsoft ACPI-Compliant System
(ISA) 0x0000006C (108)	Microsoft ACPI-Compliant System
(ISA) 0x0000006D (109)	Microsoft ACPI-Compliant System
(ISA) 0x0000006E (110)	Microsoft ACPI-Compliant System
(ISA) 0x0000006F (111)	Microsoft ACPI-Compliant System
(ISA) 0x00000070 (112)	Microsoft ACPI-Compliant System
(ISA) 0x00000071 (113)	Microsoft ACPI-Compliant System
(ISA) 0x00000072 (114)	Microsoft ACPI-Compliant System
(ISA) 0x00000073 (115)	Microsoft ACPI-Compliant System
(ISA) 0x00000074 (116)	Microsoft ACPI-Compliant System
(ISA) 0x00000075 (117)	Microsoft ACPI-Compliant System
(ISA) 0x00000076 (118)	Microsoft ACPI-Compliant System
(ISA) 0x00000077 (119)	Microsoft ACPI-Compliant System
(ISA) 0x00000078 (120)	Microsoft ACPI-Compliant System
(ISA) 0x00000079 (121)	Microsoft ACPI-Compliant System
(ISA) 0x0000007A (122)	Microsoft ACPI-Compliant System
(ISA) 0x0000007B (123)	Microsoft ACPI-Compliant System
(ISA) 0x0000007C (124)	Microsoft ACPI-Compliant System
(ISA) 0x0000007D (125)	Microsoft ACPI-Compliant System
(ISA) 0x0000007E (126)	Microsoft ACPI-Compliant System
(ISA) 0x0000007F (127)	Microsoft ACPI-Compliant System
(ISA) 0x00000080 (128)	Microsoft ACPI-Compliant System
(ISA) 0x00000081 (129)	Microsoft ACPI-Compliant System
(ISA) 0x00000082 (130)	Microsoft ACPI-Compliant System

	0x00000083 (131)	Microsoft ACPI-Compliant System
	0x00000084 (132)	Microsoft ACPI-Compliant System
	0x00000085 (133)	Microsoft ACPI-Compliant System
	0x00000086 (134)	Microsoft ACPI-Compliant System
	0x00000087 (135)	Microsoft ACPI-Compliant System
	0x00000088 (136)	Microsoft ACPI-Compliant System
	0x00000089 (137)	Microsoft ACPI-Compliant System
	0x0000008A (138)	Microsoft ACPI-Compliant System
	0x0000008B (139)	Microsoft ACPI-Compliant System
	0x0000008C (140)	Microsoft ACPI-Compliant System
	0x0000008D (141)	Microsoft ACPI-Compliant System
	0x0000008E (142)	Microsoft ACPI-Compliant System
	0x0000008F (143)	Microsoft ACPI-Compliant System
	0x00000090 (144)	Microsoft ACPI-Compliant System
	0x00000091 (145)	Microsoft ACPI-Compliant System
	0x00000092 (146)	Microsoft ACPI-Compliant System
	0x00000093 (147)	Microsoft ACPI-Compliant System
	0x00000094 (148)	Microsoft ACPI-Compliant System
	0x00000095 (149)	Microsoft ACPI-Compliant System
	0x00000096 (150)	Microsoft ACPI-Compliant System
	0x00000097 (151)	Microsoft ACPI-Compliant System
	0x00000098 (152)	Microsoft ACPI-Compliant System
	0x00000099 (153)	Microsoft ACPI-Compliant System
	0x0000009A (154)	Microsoft ACPI-Compliant System
	0x0000009B (155)	Microsoft ACPI-Compliant System
	0x0000009C (156)	Microsoft ACPI-Compliant System
	0x0000009D (157)	Microsoft ACPI-Compliant System
	0x0000009E (158)	Microsoft ACPI-Compliant System
	0x0000009F (159)	Microsoft ACPI-Compliant System
	0x000000A0 (160)	Microsoft ACPI-Compliant System
	0x000000A1 (161)	Microsoft ACPI-Compliant System
	0x000000A2 (162)	Microsoft ACPI-Compliant System
	0x000000A3 (163)	Microsoft ACPI-Compliant System
	0x000000A4 (164)	Microsoft ACPI-Compliant System
	0x000000A5 (165)	Microsoft ACPI-Compliant System
	0x000000A6 (166)	Microsoft ACPI-Compliant System
	0x000000A7 (167)	Microsoft ACPI-Compliant System
	0x000000A8 (168)	Microsoft ACPI-Compliant System
	0x000000A9 (169)	Microsoft ACPI-Compliant System
	0x000000AA (170)	Microsoft ACPI-Compliant System
	0x000000AB (171)	Microsoft ACPI-Compliant System
	0x000000AC (172)	Microsoft ACPI-Compliant System
	0x000000AD (173)	Microsoft ACPI-Compliant System
	0x000000AE (174)	Microsoft ACPI-Compliant System
	0x000000AF (175)	Microsoft ACPI-Compliant System
	0x000000B0 (176)	Microsoft ACPI-Compliant System
	0x000000B1 (177)	Microsoft ACPI-Compliant System
	0x000000B2 (178)	Microsoft ACPI-Compliant System
	0x000000B3 (179)	Microsoft ACPI-Compliant System
	0x000000B4 (180)	Microsoft ACPI-Compliant System
	0x000000B5 (181)	Microsoft ACPI-Compliant System
	0x000000B6 (182)	Microsoft ACPI-Compliant System
	0x000000B7 (183)	Microsoft ACPI-Compliant System
	0x000000B8 (184)	Microsoft ACPI-Compliant System
	0x000000B9 (185)	Microsoft ACPI-Compliant System
	0x000000BA (186)	Microsoft ACPI-Compliant System
	0x000000BB (187)	Microsoft ACPI-Compliant System
	0x000000BC (188)	Microsoft ACPI-Compliant System
	0x000000BD (189)	Microsoft ACPI-Compliant System
	0x000000BE (190)	Microsoft ACPI-Compliant System

B.4 DMA Channel Assignments



Direct memory access (DMA)



4 Direct memory access controller

Appendix

C

Mating Connector

C.1 List of Mating Connectors and Cables

The table notes mating connectors and available cables.

Connector Label	Function	Mating Connector		Available Cable	Cable P/N
		Vendor	Model No.		
CON2	+12V AUX power connector	PINREX	POWER CON 4P S/T,ATX,W/PG2 PINREX/740-41-0 4TWC0.DIP		
CHA_FAN	System FAN connector	PINREX	WAFER HD 4P S/T 2.54MM L-GRAY PINREX/744-81-0 4TG20 [EL].DIP		
COM3	COM 3 connector	CATCH	(TF)BOX HEADER.5*2P.18 0D.(M).2.0mm.DI P.WO PIN10.CATCH.11 47-000-10SA		
COM4	COM 4 connector	CATCH	(TF)BOX HEADER.5*2P.18 0D.(M).2.0mm.DI P.WO PIN10.CATCH.11 47-000-10SA		
COM5	COM 5 connector	CATCH	(TF)BOX HEADER.5*2P.18 0D.(M).2.0mm.DI P.WO PIN10.CATCH.11 47-000-10SA		
CON1	SIM card socket	HAMBURG	SIM CON 6P 2.54 PITCH SMT HAMBURG/ICA-5 09.SMD		

CPU_FAN	CPU FAN connector	PINREX	WAFER HD 4P S/T 2.54MM L-GRAY PINREX/744-81-0 4TG20 [EL].DIP		
DIGITALREFERENCE	GPIO/SM BUS/COM2 / COM2 external power select	JVE	HEADER 2X10P,S/T,2.0mm ,STACK JVE/21N22050-2 0S22B01G4/9.2/2 .DIP		
F_PANEL	Front panel pin header	PINREX	HEADER 2X5P 2.54mm S/T.K10 G/F PINREX/210-92-0 5GB02		
KB/MS	PS/2 Keyboard / Mouse connector	Ho-Base	(TF)WAFER BOX.6P.180D(M). 2.0mm.W/LOCK DIP.何 迪.2005-2WS-6		
LCD_POWE	LVDS panel power connector	CATCH	(TF)WAFER BOX.5P.180D.(M) .2.0mm.W/LOCK DIP.CATCH.1192- 700-05S		
LPT	Parallel port connector	PINREX	HEADER 2X13P,S/T,2.54m m,K26 PINREX/210-92-1 3GB11 [EL].DIP		
LVDS	LVDS panel connector	E-call	(TF)Board-Wire Connector.30P.18 0D(M).SMD.Pitch =1.25mm.W/Reinf orcem.E-call.0110 -01-553-300		
PCIEX1_1	PCI-E X1 slot	E-MOVE	SLOT 36P G/F PCIE X1,DARK		

			BLUE E-MOVE/EE0360 -1GGZ-00H [GA].DIP		
SATA_PWR1	Serial ATA power Connector	CATCH	(TF)WAFER.4P.1 80D.(M).2.5mm. W/LOCK POWER DIP.CATCH.1198- 700-04S.		
SATA3G_1	SATA 0 Connector	LOTES	SATA CON 7P S/T G/F,DIP,CHARL LOTES/ABA-SAT- 046-K13.DIP		
SATA3G_2	SATA 1 Connector	LOTES	SATA CON 7P S/T G/F,DIP,CHARL LOTES/ABA-SAT- 046-K13.DIP		
USB56	USB 5 & 6 pin header	JVE	(TF)PIN HEADER.5*2P.18 0D.(M).2.0mm.DI P		
WLAN	Mini PCI-E SLOT	LOTES	MINI PCI-E 52P,0.8MM,9.0H SMT LOTES/AAA-PCI- 047-P01 [HF].SMD		

Note: The Cable P/N with “ * ” sign is for WITAS series products.