

## **Gladius 5**

## 5.5" Rugged IoT Handheld Device with Quad-core Processor





## **Features**


- Fully rugged for warehousing / transportation / medical / mPOS applications
- MIL-STD-810G & IP-65 certified, 1.5m (5ft.) drop resistance
- 5.5"TFT color LCD 1280 x 720 HD resolution
- Projected capacitive multi-touch panel with anti-reflection Corning® Gorilla® Glass 3
- High mobility with multiple connectivities including WLAN, Bluetooth and WWAN
- Built-in 1D barcode reader or 2D barcode imager
- Field replaceable battery with optimized battery life up to 8 hours
- Wireless charge supported
- G-sensor, gyroscope, light sensor, E-compass, GPS navigation & barometer
- System access control via RFID & NFC reader

Durability Featu	ires	
MIL-STD-810G & I	P-65 certified	
1.5m (5ft.) drop-res	sistance	
Raised bezel for Lo	CD impact protection	
I/O ports with hinge	ed rubber covers	
System		
CPU	MTK MT6589 Quad-core Cortex™A7 1GHz CPU PowerVR™ Series5XT GPU	
OS	Android™ v4.2	
Memory	1GB	
Storage	8GB	
Audio	Integrated microphone	
	Integrated speaker	
	1 x 3.5mm stereo headphone jack	
Peripherals and	Devices	
Camera	Front: 2.0 MP camera (Model with 1D&2D barcode reader is not equipped with front-camera)	
	Rear: 8.0 MP AF camera with LED	
	Accelerometer (G-sensor)	
Sensor	3-axis digital gyroscope	
	Barometer	
Light Sensor	Ambient light sensor	
NFC	ISO/IEC 21481 Type A, Type B, Felica	
WLAN	Integrated IEEE 802.11 b/g/n	
Bluetooth	Integrated Bluetooth 4.0 + EDR class 2, with HID input, A2DP, DUN, HFP, SPP & PBAP supported	
WWAN	WCDMA UMTS 850/900/1900/2100M	
Navigation	GPS, AGPS & digital compass	
Barcode Scanner	1D or 1D&2D barcode reader with physical trigger	
I/O Interface		
USB Port	1 x Micro USB 2.0 port	
SD Slot	1 x microSD card slot (up to 16G)	
SIM Socket	2 x SIM card slots	
Expansion	microSDHC	

LCD Display	
Size/Type	5.5" TFT LCD
Resolution	1280 x 720
Touch Screen	
Туре	5-point Projected Capacitive Touch screen
	Corning® Gorilla® Glass 3 w/ anti-reflection coating
Power Supply	
Power System	External AC power adapter
	Lithium-ion rechargeable battery
Battery Type	Field replaceable (for maintenance)
	Wirelessly rechargable (only works with ARBOR wireless cradle and docking)
Battery Capacity	3.7V, 3600mAh, 13.32Wh
	Up to 8 hours battery life with the following operations:
	<ol> <li>Continuous audio playback of 160-Kbps encoded MP3 files</li> </ol>
Battery Life	2. Internet browsing by Wi-Fi while:
	Browsing snapshot versions of 20 separate web pages
	b. Using hourly push-email
	Continuous video playback for 6 hours
Adapter Input	Input: AC100~240C, 50~60 Hz
Adapter Output	DC power output: 5V/2.1A
Mechanical & Er	nvironmental
Operating Temp.	0°C ~ 45°C (32°F ~ 113°F)
Storage Temp.	-10°C ~ 60°C (-14°F ~ 140°F)
Operating Humidity	95% (non-condensing)
Dimensions (W x H x D)	84.0 x 175.6 x 15.9 mm (3.31" x 6.91" x 0.63")
Weight	280g (0.62lb) (with battery)
<b>Ordering Inform</b>	ation
G551B	5.5" Android™ Rugged IoT Handheld Device with Quad-core Processor, Front & Rear Camera and 1D Barcode Scanner
G552B	5.5" Android™ Rugged IoT Handheld Device with Quad-core Processor, Rear Camera and 1D & 2D Barcode Scanner



## **Dimensions**

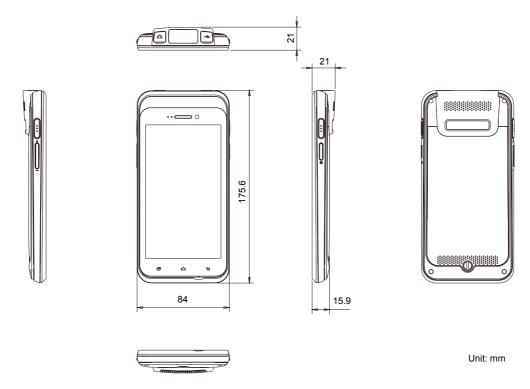

Standard Accessories			
	Universal power adapter	8.0	
	Rechargeable Li-ion battery pack	20 23 20 ALCOHOLO 4	
	Earphone	<b>%</b>	
	SIM card adapter	The Control of the Co	
	User Manual	Manual	
Optional Acc	essories		
D.Dock-G5	Desktop cradle w/ wireless charger	AMERICA STATE OF THE PARTY OF T	
V.Dock-G5	In-vehicle docking w/ wireless charger		