


# EX27000/EX77000 Series

Managed 24-port 10/100BASE and 4-port Gigabit Ethernet Switch with SFP Options



SFP Ports with DDM

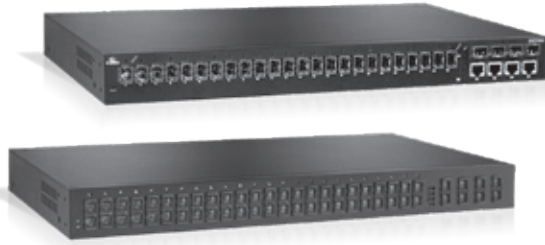

## Value

- Provides flexibility of 24-port 10/100BASE-TX/FX/BX/SFP and 4-port Gigabit-TX/SX/LX/BX/SFP
- Flexibly configures each port configuration thru SFP modules
- Fanless design to minimize maintenance hassles

## Features

- Complies with EN50121-4 Railway application environment
- Supports  $\alpha$ -ring and RSTP/MSTP/STP for Ethernet redundancy
- IP Multicast Filtering through IGMP Snooping V1, V2 & V3
- Supports port-based VLAN and IEEE802.1Q VLAN Tagging and GVRP
- IEEE802.1p QoS with four priority queues
- MAC-based trunking with automatic link fail-over
- RS-232 console, Telnet, SNMP V1, V2c & V3, RMON, Web Browser, and TFTP Management
- Supports Command Line Interface in RS-232 Console
- Supports IEEE802.1x Security
- Bandwidth Rate Control
- Per-port programmable MAC address locking
- Up to 24 Static Secure MAC addresses per port
- Port mirroring
- Supports NTP
- 1000Mbps-Full-duplex, 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- Full wire-speed forwarding rate
- -40°C to +75°C (-40°F to 167°F) operating temperature range

## Ordering Information

EX27604-0XYZ/EX77604-0XYZ	24-port 10/100BASE-TX + 4-port Gigabit Managed Ethernet Switch
EX27424-WXYZ/EX77424-WXYZ	16-port 10/100BASE-TX + 8-port 100BASE-FX + 4-port Gigabit Managed Ethernet Switch
EX27244-WXYZ/EX77244-WXYZ	8-port 10/100BASE-TX + 16-port 100BASE-FX + 4-port Gigabit Managed Ethernet Switch
EX27064-WXYZ/EX77064-WXYZ	24-port 100BASE-FX + 4-port Gigabit Managed Ethernet Switch
EX27064-V0VZ/EX77064-V0VZ	24-port 100BASE-SFP + 4-port Gigabit SFP Combo Managed Ethernet Switch

### 100FX Fiber Options :

- (W) = 1 : Multi Mode (SC) - 2Km  
 2 : Multi Mode (ST) - 2Km  
 6 : Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 2Km  
 7 : Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 2Km  
 8 : Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 5Km  
 9 : Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 5Km  
 A : Single Mode (SC) - 20Km  
 \*More 100FX Fiber options also available upon request.

- B : Single Mode (SC) - 40Km  
 F : Single Mode (FC) - 20Km  
 H : Single Mode (ST) - 20Km  
 P : Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 20Km  
 Q : Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 20Km  
 R : Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 40Km  
 S : Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 40Km

### Numbers of fixed Gigabit Fiber :

- (X) = 0 : None  
 1 : One Gigabit Fiber Port  
 2 : Two Gigabit Fiber Ports  
 3 : Three Gigabit Fiber Ports  
 4 : Four Gigabit Fiber Ports

### Gigabit Options :

- (Y) = 1 : 10/100/1000BASE-TX  
 3 : 1000BASE-SX (SC) - 550m  
 4 : 1000BASE-SX (SC) - 2Km  
 5 : 1000BASE-SX (ST) - 550m  
 A : 1000BASE-LX (SC) - 10Km  
 B : 1000BASE-LX (SC) - 20Km  
 \*More Gigabit options also available upon request.

- R : 1000BASE-BX (SC) WDM-TX:1310nm/RX:1550nm - 20Km  
 S : 1000BASE-BX (SC) WDM-TX:1550nm/RX:1310nm - 20Km  
 V : 4-port 1000BASE SFP Combo(1000Mbps SFP Combo with 10/100/1000BASE-TX)

### Power Input Interface :

- (Z) = T : + / - 48VDC (Terminal Block)  
 W : 88 - 370VDC and 90 - 264VAC (Terminal Block)  
 C : 90 - 264VAC (AC Inlet)  
 TR : + / - 48VDC Redundant (Terminal Block)  
 WR : 88 - 370VDC and 90 - 264VAC Redundant (Terminal Block)  
 CR : 90 - 264VAC Redundant (AC Inlet)

## Specifications

Technology	
Standards	IEEE802.3 10BASE-T, IEEE802.3u 100BASETX/100BASE-FX, IEEE802.3ab 1000BASE-T, IEEE802.3z 1000BASESX/1000BASE-LX, IEEE802.3x, IEEE802.1p, IEEE802.1Q, IEEE802.1w, IEEE802.1x
Forward and Filtering Rate	14,880pps for 10Mbps 148,810pps for 100Mbps 1,488,100pps for 1000Mbps
Packet Buffer Memory	3M bits
Processing Type	Store-and-Forward Half-duplex back-pressure and IEEE802.3x full-duplex flow control
Address Table Size	8192 MAC addresses
Power	
Input	(T) : + / - 48VDC(36 - 75VDC) Internal Universal PSU (W) : 88 - 370VDC and 90 - 264VAC Internal Universal PSU (C) : 90 - 264VAC, 50 - 60Hz Internal Universal PSU
Power Consumption	42.7W Max.
Overload Protection	Present
Mechanical	
Casing	Metal case IP30
Dimensions	Single Power: 442mm (W) x 250mm (D) x 44.2mm (H) (17.4" (W) x 9.8" (D) x 1.74" (H)) Redundant Power: 442mm (W) x 360mm (D) x 44.2mm (H) (17.4" (W) x 14.1" (D) x 1.74" (H))
Weight	6.2Kg (13.7lbs.)
Installation	Rack Mounting
Interface	
Ethernet Port	10/100BASE-TX: 24, 20, 16, 12, 8, 4 or 0 port 100BASE-FX: 0, 4, 8, 12, 16, 20 or 24 ports 100BASE-SFP:0 or 24 ports Gigabit: 0, 2 or 4 ports Gigabit-SFP Combo: 0 or 4 ports
Console Port	Port: One DB9 RS-232 port
LED Indicators	Per Unit: Power Status Per Port: 10/100TX, 100FX: Link/Activity (Green) 10/100/1000TX, 1000SX/LX: Link/Activity (Green)

Environment	
Operating Temperature	-10°C to +60°C (14°F to 140°F) (EX27000)
Storage Temperature	-40°C to +75°C (-40°F to 167°F) (EX77000)
Ambient Relative Humidity	5% to 95% (non-condensing)
Regulatory Approvals	
ISO	Manufactured in an ISO9001 facility
Safety	EN60950-1, IEC60950-1
EMI	*FCC Part 15, Class A *EN61000-6-4 - EN55022 - EN61000-3-2 - EN61000-3-3
EMS	*EN61000-6-2 - EN61000-4-2 (ESD Standards) Contact: + / - 6KV; Criteria B Air: + / - 8KV; Criteria B - EN61000-4-3 (Radiated RFI Standards) 10V/m, 80 to 1000MHz; 80% AM Criteria A - EN61000-4-4 (Burst Standards) Signal Ports: + / - 4KV; Criteria B A.C. Power Ports: + / - 4KV; Criteria B D.C. Power Ports: + / - 4KV; Criteria A - EN61000-4-5 (Surge Standards) Signal Ports: + / - 1KV; Line-to-Line; Criteria B A.C Power Ports: +/-0.5KV Line-to-Earth, Criteria B - EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A A.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A - EN61000-4-8 (Magnetic Field Standards) 30A/m @ 50, 60Hz; Criteria A
Environmental Test Compliance	*IEC60068-2-6 Fc (Vibration Resistance) 2g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) *IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) *IEC60068-2-32 Ed (Free Fall) 1M (3.281ft.)

## Dimensions

